

LIGHT N°1

OUTDOOR LAMP




reddot winner 2024
lighting design

A portable solar powered lamp for
outdoor and indoor use

Designed by HENRIK PEDERSEN

HOUE

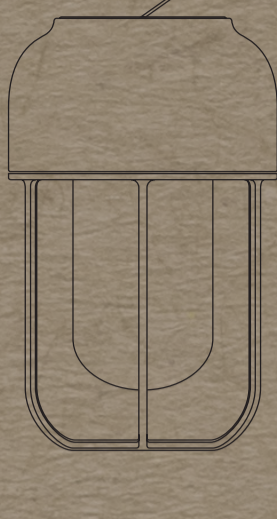

OUTDOOR/
INDOOR USE



3 LIGHT INTENSITY
LEVELS



WATERPROOF
IP65



BATTERY LIFE
(8H-100H)




SOLAR
POWERED



WIRELESS
CHARGING



5 YEARS
WARRANTY

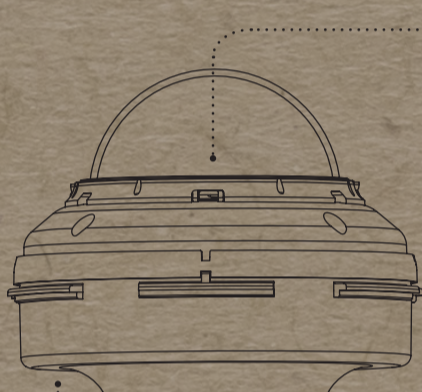


C



B



A

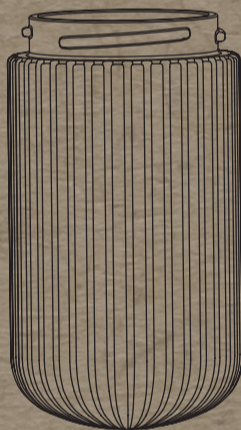

D



UK USER GUIDE

- A Press switch pin to turn ON-OFF / Adjust brightness: 1 x turn ON + HIGH / 2 x MEDIUM / 3 x LOW intensity level. Press switch pin and hold 1 sec. to turn OFF.
- B Battery indicator dots illuminate 4 sec. when switching on.
- C Handle for hanging. Solar charging built in.
- D Charging pad. Wireless charging with the option to power up smartphones or other devices. While charging, the indicator dots will illuminate to display the battery level for 4 sec. The charging pad must be used in a dry place.

Charging time Approx. 4 hours from 0% – 100%.

Battery capacity Intensity level – High: 8h / Medium: 16h / Low: 100h.
The lamp will power down to "low" after 5h and switch off after 10h continuous use.
The indicated hours are based on temperatures exceeding 10 °C.

Technical information

Charger	Wireless charging	Power supply	
Battery	3,6V Lithium, 2600 mAh	Input	100-240V AC 50-60 Hz 0,5A
Light type	LED	Output	USB-C 5V DC 3A / 9V DC 2.22A / 12V DC 1.67A (20.04W Max)
Kelvin	2500K	Frequency band	110,6 KHz to 146,8 KHz
Power	1W / 95 lm	H-Field	-20,29 dBµA/m @ 10 m
Wireless charger input voltage	9V DC		Wireless charger for the lamp enclosed

The luminaires shall be supplied by an independent separated extra-low voltage (SELV) power source, which should be certified with standard EN 61347-2-13 (Class II, IP20 or higher, fail-safe, or short circuit proof, with suitable output ratings, and maximum output voltage shall not exceed 60 VDC).

Maintenance
Repair Use soft cloth with lukewarm water. Avoid any kind of chemical detergents. The product can be disassembled, allowing for the replacement of technical components. For spare part information, please contact your HOUE point of sale or visit houe.com.

Battery safety The light source contained in this luminaire shall only be replaced by the manufacturer, service agent or similar qualified person.

- Replacement of a battery with an incorrect type that can defeat a safeguard and can only be replaced by skilled persons.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting it can result in an explosion.
- Leaving a battery in an extremely high temperature environment can lead to an explosion or leakage of flammable liquid or gas; and
- A battery exposed to extremely low air pressure may lead to an explosion or leakage of flammable liquid or gas.

Manufactured by:
Bao Jie Electronics (Shenzhen) / Limited for HOUE ApS.
In accordance with the WEEE Directive 2012/19/EU, you must return the electronic unit to a collection point for recycling at the end of its lifecycle.

Please contact HOUE ApS for further information.

